


## AQUALIFE 818 4.0 TPE

<b>Applications</b>	drinking water, beverage production & conveying
<b>Structure</b>	TPE/E, blue, opaque, cross braid
<b>Temperature</b>	-30°C up to 70°C, short term up to 90°C
<b>Properties</b>	hydrolysis & microbe resistant, weather proof, high pressure resistance, crush-resistant, smooth inside, smooth outside
<b>Norms</b>	DVGW W 270

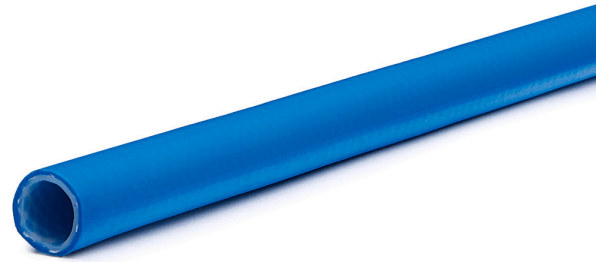

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Burst Pressure (bar)	Weight (kg/m)	Total Weight per Piece (kg)	Length (m)	Article Number
10	15,40	2,50	70	14,00	42,00	0,09000	2,25	25	818010252504
10	15,40	2,50	70	14,00	42,00	0,09000	4,50	50	818010255004
13	18,80	3,00	70	15,00	45,00	0,14120	3,53	25	818013302504
13	18,80	3,00	70	15,00	45,00	0,14100	7,05	50	818013305004
19	27,20	4,10	130	15,00	45,00	0,23200	11,60	50	818019385004
19	26,60	4,10	130	15,00	45,00	0,23200	5,80	25	818019382504
25	34,60	4,80	220	10,00	30,00	0,40720	10,18	25	818025482504
25	34,60	4,80	220	10,00	30,00	0,40700	20,35	50	818025485004