


APDatec 103

Very flexible and light weight PVC hose with shock-resistant hard PVC spiral

Applications	pond technology, water drain, irrigation, waste water, filter systems
Structure	PVC / soft PVC, black, opaque, plastic spiral / rigid PVC
Temperature	-5°C up to 60°C
Properties	very good flexibility, corrugated outside, smooth inside, , good ozone- & UV-resistance

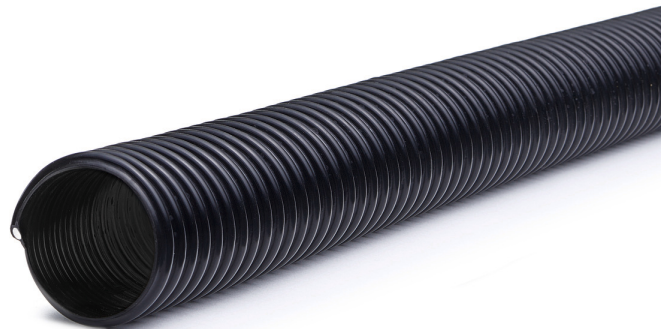

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Vacuum Max. (bar)	Weight (kg/m)	Total Weight per Piece (kg)	Length (m)	Article Number
19	23,80	2,40	19	0,39	0,11000	3,60	30	1030190300
25	30,00	2,50	25	0,39	0,18000	1,80	10	1030250100
25	30,00	2,50	25	0,39	0,13000	5,40	30	1030250300
32	38,00	3,00	32	0,34	0,22000	2,20	10	1030320100
32	38,00	3,00	32	0,34	0,20500	6,60	30	1030320300
38	44,40	3,20	38	0,29	0,26000	2,70	10	1030380100
38	44,40	3,20	38	0,29	0,26000	8,10	30	1030380300
40	46,40	3,20	40	0,29	0,28000	2,80	10	1030400100
40	46,40	3,20	40	0,29	0,27000	8,40	30	1030400300
50	57,00	3,50	50	0,29	0,43500	12,60	30	1030500300