Plexus AT with fittings

Anti-torsion hose with claw coupling

Applications	irrigation, agriculture
Structure	soft PVC, yellow, opaque, tricot knitting
Temperature	-25°C up to 65°C
Properties	smooth outside, smooth inside, weather proof, good ozone- & UV-resistance, hydrolysis & microbe resistant, phthalate-free

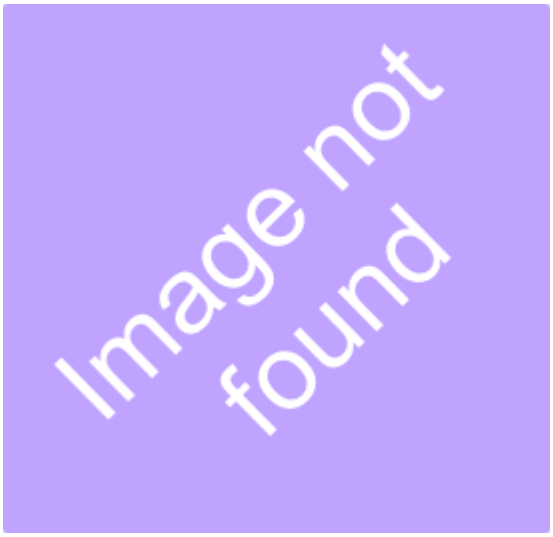

microbe-resistant

liquids

made in Germany

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Max. Operating Pressure (bar)	Burst Pressure (bar)	Total Weight per Piece (kg)	Length (m)	Article Number
12,5	16,80	2,15	10,00	30,00	6,90	50	8340130500K
12,5	16,80	2,15	10,00	30,00	3,50	0,38	8340130250K
19	24,40	2,70	7,00	21,00	6,30	25	8340190250K
19	24,40	2,70	7,00	21,00	12,30	50	8340190500K
25	31,60	3,30	6,00	18,00	20,30	50	8340250500K
25	31,60	3,30	6,00	18,00	10,50	25	8340250250K

Ocono APD Schlauchtechnik GmbH | Technologiering 12 | 41751 Viersen | Germany | T +49 2162 361950 | apd@ocono.com

All technical data, measured at 23°C, are general orientation values and are subject to production-related tolerances. Max. operating pressures apply only for short periods. Technical changes and color deviations are subject to change. Other versions are available upon request.
Date: 24.11.2026