FLEXACIER® OIL-Press 272

Flexible hose made of PVC / NBR, oil resistant

Applications fuel delivery, compressors, automotive engineering, automation technology & robotics, vehicle construction

Structure PVC NBR, black, opaque, steel wire / spring steel wire / not coated / galvanized

Temperature -15°C up to 60°C

Properties good flexibility, very high vacuum resistance high pressure resistance, smooth inside smooth outside, good oil resistance, weather proof

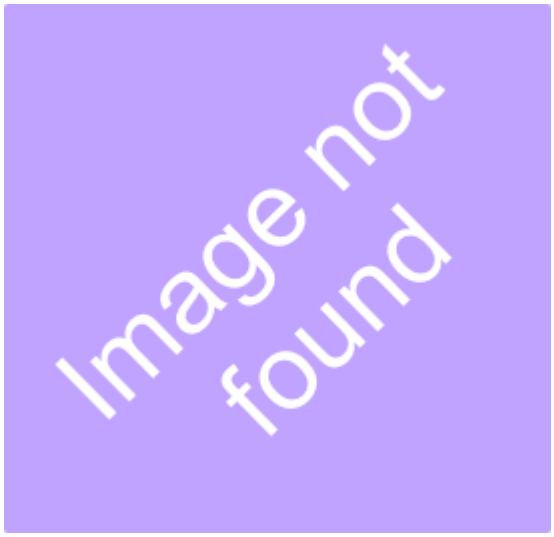



Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Weight (kg/m)	Total Weight per Piece (kg)	Length (m)	Article Number
25	35,00	5,00	60	10,00	0,88	0,50600	39,60	60	2720250600
32	42,00	5,00	90	10,00	0,88	0,64000	31,20	40	2720320400
38	50,50	6,30	120	10,00	0,88	0,77600		40	2720380400
40	52,50	6,30	125	10,00	0,88	0,92000	48,00	40	2720400400
50	62,50	6,30	145	8,00	0,88	1,26000	59,60	40	2720500400

Ocono APD Schlauchtechnik GmbH | Technologiering 12 | 41751 Viersen | Germany | T +49 2162 361950 | apd@ocono.com

All technical data, measured at 23°C, are general orientation values and are subject to production-related tolerances. Max. operating pressures apply only for short periods. Technical changes and color deviations are subject to change. Other versions are available upon request.
Date: 24.11.2026