


## OneFlat SL

Light weight flat hose with a PVC inner layer and woven polyester yarn inlay

- Applications** waste water, agricultural technology, construction machines, construction drying, irrigation
- Structure** PVC, blue, opaque
- Temperature** -20°C up to 65°C
- Properties** light weight, crush-resistant can be driven over, high pressure resistance, smooth inside smooth outside

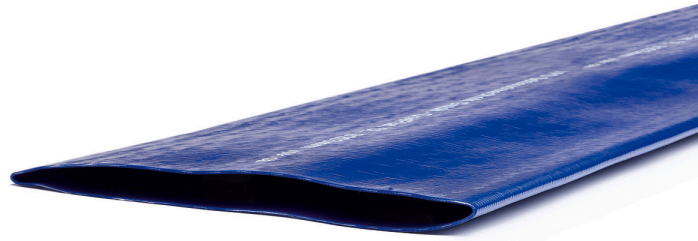

Inner Diameter (mm)	Max. Operating Pressure (bar)	Burst Pressure (bar)	Weight (kg/m)	Total Weight per Piece (kg)	Length (m)	Article Number
152	3,00	9,00	0,90000	45,00	50	701520500
203	3,00	8,00	1,60000	80,00	50	702030500