APDatec 841

Flexible hose made of soft PVC, oil-resistant

Applications fuel delivery, compressors, vehicle construction, automotive engineering, waste management

Structure soft PVC, uncolored, transparent

Temperature -20°C up to 60°C

Properties light weight, good flexibility, high pressure resistance, good oil & petrol resistance, good resistance to compressed air containing mineral oil, good chemical resistance

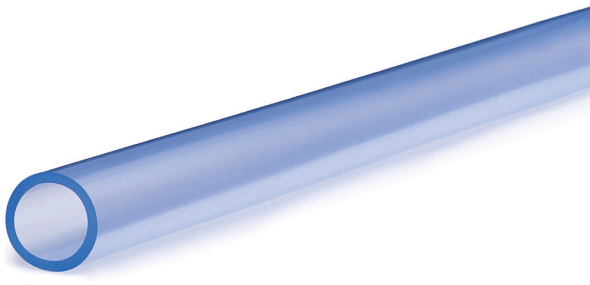





made in Germany

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Burst Pressure (bar)	Weight (kg/m)	Total Weight per Piece (kg)	Length (m)	Article Number
4	6,00	1,00	6,50	0,01920	1,92	100	8410041000
4	8,00	2,00	10,00	0,04620	4,62	100	8410042000
5	9,00	2,00	10,50	0,05390	5,39	100	8410052000
6	12,00	3,00	12,00	0,10390	10,39	100	8410063000
6	10,00	2,00	9,00	0,06160	6,16	100	8410062000
8	12,00	2,00	7,00	0,07700	3,85	50	8410082000
10	14,00	2,00	6,00	0,09240	4,62	50	8410102050
12	16,00	2,00	5,00	0,10780	5,39	50	8410122050
13	19,00	3,00	6,50	0,18460	9,23	50	8410133050
15	21,00	3,00	6,00	0,20800	10,40	50	8410153050
16	21,00	2,50	4,50	0,18600	9,30	50	8410162550
19	27,00	4,00	6,30	0,35400	17,70	50	8410194050
30	39,00	4,50	4,50	0,59800	14,95	25	8410304525

Ocono APD Schlauchtechnik GmbH | Technologiering 12 | 41751 Viersen | Germany | T +49 2162 361950 | apd@ocono.com

All technical data, measured at 23°C, are general orientation values and are subject to production-related tolerances. Max. operating pressures apply only for short periods. Technical changes and color deviations are subject to change. Other versions are available upon request.
Date: 25.11.2026