
APDatec 14

Flexible hose made of soft PVC, reinforced with an shock

Applications	agriculture, water drain, irrigation, sewage treatment plants, pump technology
Structure	soft PVC, green, opaque, plastic spiral / rigid PVC
Temperature	-5°C up to 60°C
Properties	good flexibility, high pressure resistance, high vacuum resistance, corrugated outside, very smooth inside, good chemical resistance, good ozone- & UV-resistance, hydrolysis & microbe resistant, weather proof





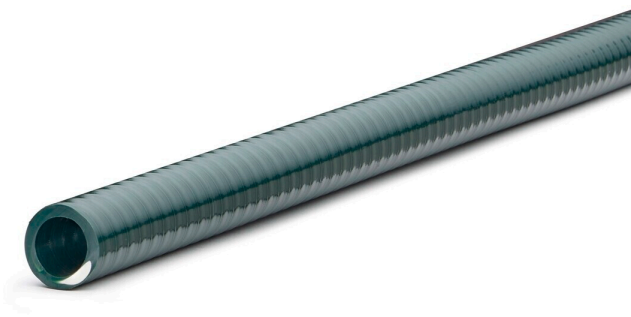

made in Germany

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Weight (kg/m)	Total Weight per Piece (kg)	Length (m)	Article Number
25	33,40	4,20	140	7,00	0,78	0,48000	24,00	50	140250500
38	47,00	4,50	180	7,00	0,78	0,71000	35,60	50	140380500
50	59,40	4,70	220	7,00	0,78	1,08000	48,25	50	140500500
75	86,60	5,80	300	5,00	0,78	1,80000	85,00	50	140750500

Ocono APD Schlauchtechnik GmbH | Technologiering 12 | 41751 Viersen | Germany | T +49 2162 361950 | apd@ocono.com

All technical data, measured at 23°C, are general orientation values and are subject to production-related tolerances. Max. operating pressures apply only for short periods. Technical changes and color deviations are subject to change. Other versions are available upon request.
Date: 24.11.2026