


APDatec 148

Very flexible hose made of soft PVC, reinforced with an shock resistant rigid PVC spiral

Applications	liquid manure spreading, waste water, sewage treatment plants, agriculture, water drain
Structure	PVC / soft PVC, blue, opaque, plastic spiral / rigid PVC
Temperature	-40°C up to 50°C
Properties	good flexibility, crush-resistant, very high vacuum resistance, high pressure resistance, , very smooth inside, corrugated outside

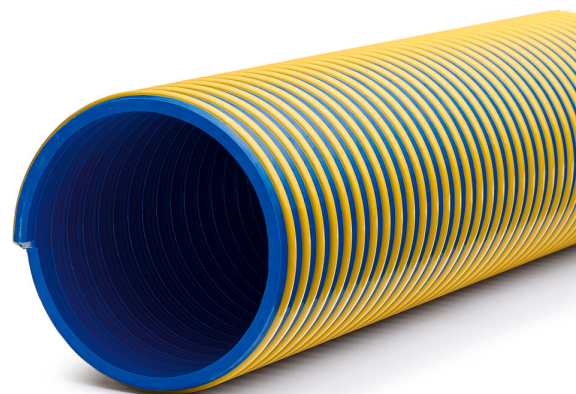

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Weight (kg/m)	Total Weight per Piece (kg)	Length (m)	Article Number
63	73,00	5,00	230	3,00	0,83	1,40000	70,00	50	1480630500
80	93,00	6,50	260	3,00	0,83	1,95000	97,50	50	1480800500
90	103,00	6,50	300	3,00	0,83	2,15000	107,50	50	1480900500
102	116,00	7,00	330	2,50	0,83	2,70000	135,00	50	1481020500
110	124,00	7,00	380	2,50	0,83	3,00000	75,00	25	1481100250
127	143,00	8,00	480	2,00	0,83	3,90000	97,50	25	1481270250
152	171,00	9,50	650	2,00	0,78	5,20000	130,00	25	1481520250