APDatec 811

Multilayer PVC hose with high tear resistant Polyester fabric, oil resistant

Applications compressed air, fuel delivery, construction machines, vehicle construction, compressors

Structure PVC, uncolored, transparent, cross braid

Temperature -20°C up to 65°C

Properties good flexibility, high pressure resistance, good oil & petrol resistance, good resistance to compressed air containing mineral oil, very good chemical resistance, weather proof

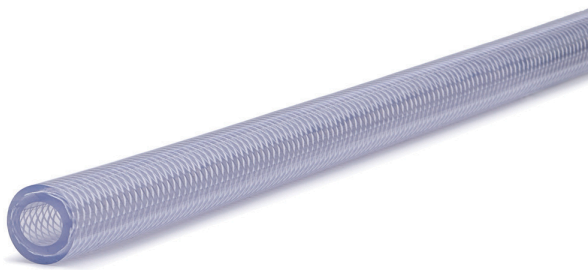





made in Germany

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Burst Pressure (bar)	Weight (kg/m)	Total Weight per Piece (kg)	Length (m)	Article Number
6	12,00	3,00	25	25,00	75,00	0,10400	5,20	50	8110063050
9	15,00	3,00	35	22,00	66,00	0,14400	7,20	50	8110093050
12	21,00	4,50	55	20,00	60,00	0,29700	14,85	50	8110124550
13	19,00	3,00	70	15,00	45,00	0,19200	9,60	50	8110133050
19	27,00	4,00	130	11,00	33,00	0,36800	18,40	50	8110194050
25	34,00	4,50	220	8,00	24,00	0,53120	13,28	25	8110254525
32	42,00	5,00	310	8,00	24,00	0,74000	18,50	25	8110325025

Ocono APD Schlauchtechnik GmbH | Technologiering 12 | 41751 Viersen | Germany | T +49 2162 361950 | apd@ocono.com

All technical data, measured at 23°C, are general orientation values and are subject to production-related tolerances. Max. operating pressures apply only for short periods. Technical changes and color deviations are subject to change. Other versions are available upon request.
Date: 24.11.2026