FLEXACIER® Press 271

Medium weight and flexible PVC suction and conveying hose made of soft PVC


Applications beverage production & conveying, food production & -conveying, wine production & -conveying, dosing

Structure soft PVC, uncolored, transparent, steel wire / iron wire / not coated / galvanized, cross braid

Temperature -10°C up to 60°C

Properties good flexibility, crush-resistant, very high vacuum resistance high pressure resistance, smooth inside smooth outside, phthalate-free

Norms certified according to Food EU Directive (EC) No. 1935/2004 & Regulation (EC) No. 10/2011 for A, B, C

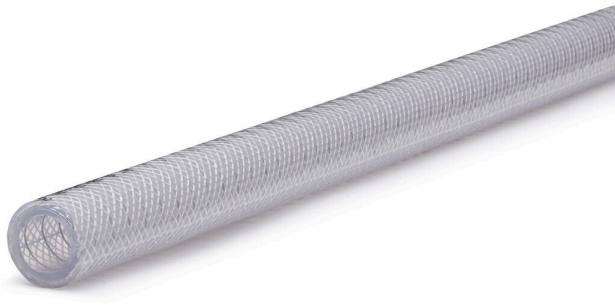





Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Weight (kg/m)	Total Weight per Piece (kg)	Length (m)	Article Number
20	29,00	4,50	60	14,00	0,88	0,47500	28,50	60	2710200600
25	35,00	5,00	75	12,00	0,88	0,65500	39,00	60	2710250600
32	43,00	5,50	96	11,00	0,88	0,89000	52,80	60	2710320600
38	49,00	5,50	110	10,00	0,88	1,03000	30,75	30	2710380300
40	51,00	5,50	120	10,00	0,88	1,07000	32,10	30	2710400300
50	63,00	6,50	150	8,00	0,88	1,65000	49,20	30	2710500300
60	74,00	7,00	180	7,00	0,88	2,08000	61,95	30	2710600300
76	91,00	7,50	230	6,00	0,69	2,68500	80,55	30	2710760300
102	118,00	8,00	310	4,00	0,69	3,85000	77,00	20	2711020200

Ocono APD Schlauchtechnik GmbH | Technologiering 12 | 41751 Viersen | Germany | T +49 2162 361950 | apd@ocono.com

All technical data, measured at 23°C, are general orientation values and are subject to production-related tolerances. Max. operating pressures apply only for short periods. Technical changes and color deviations are subject to change. Other versions are available upon request.
Date: 24.11.2026