


VACUFLEX® VAT-Elastic

Highly flexible PVC hose with coated spring steel wire

| | |
|---------------------|--|
| Applications | industrial vacuum cleaners, vacuum cleaner, cleaning, dust extraction, construction drying |
| Structure | PVC, black, opaque, steel wire / spring steel wire / coated / PVC |
| Temperature | -10°C up to 70°C, short term up to 90°C |
| Properties | good flexibility, crush-resistant, good tensile strength, good chemical resistance, good ozone- & UV-resistance, hydrolysis & microbe resistant, rot proof, weather proof, excellent mechanical properties, especially for higher tensile forces, ultra light & extremely flexible, good mechanical strength |

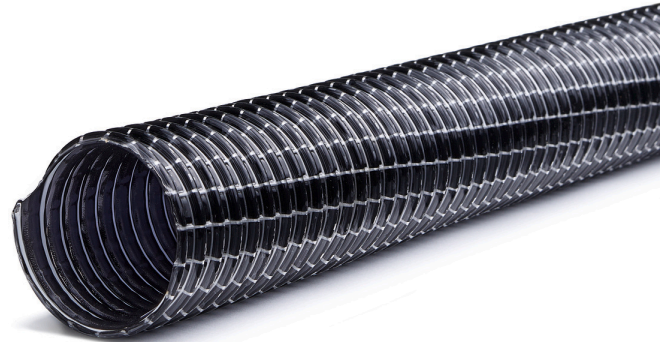

| Inner Diameter (mm) | Outer Diameter (mm) | Wall Thickness (mm) | Bending Radius (mm) | Max. Operating Pressure (bar) | Vacuum Max. (bar) | Weight (kg/m) | Article Number |
|---------------------|---------------------|---------------------|---------------------|-------------------------------|-------------------|---------------|----------------|
| 25 | 31,00 | 0,50 | 31 | 1,70 | 0,40 | 0,20000 | 560250150 |
| 32 | 38,00 | 0,50 | 38 | 1,50 | 0,35 | 0,28000 | 560320150 |
| 38 | 44,00 | 0,50 | 44 | 1,40 | 0,30 | 0,34000 | 560380150 |
| 41 | 47,00 | 0,50 | 47 | 1,40 | 0,30 | 0,37000 | 560410150 |
| 44 | 50,00 | 0,50 | 55 | 1,30 | 0,28 | 0,38000 | 560440150 |
| 51 | 57,00 | 0,50 | 57 | 1,30 | 0,28 | 0,46000 | 560510150 |