


Tigerflex PLUS

Universal water hose for use in industry, construction and agriculture

Applications	construction machines, irrigation, vehicle construction, cleaning, municipal services
Structure	EPDM, black, opaque
Temperature	-40°C up to 100°C
Properties	very good temperature resistance, very good low-temperature flexibility, crush-resistant, high pressure resistance, weather proof, good ozone- & UV-resistance

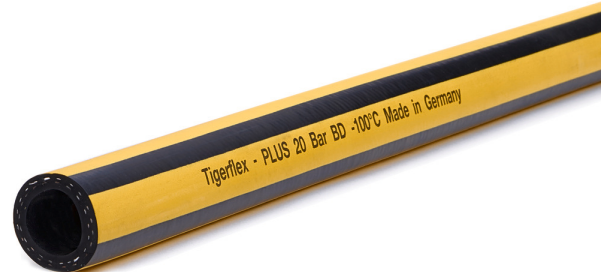

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Burst Pressure (bar)	Weight (kg/m)	Total Weight per Piece (kg)	Length (m)	Article Number
13	20,60	3,80	50	20,00	60,00	0,21000	1,05	5	80901305
13	20,60	3,80	50	20,00	60,00	0,21000	2,10	10	80901310
13	20,60	3,80	50	20,00	60,00	0,21000	3,15	15	80901315
13	20,60	3,80	50	20,00	60,00	0,24500	4,90	20	80901320
13	20,60	3,80	50	20,00	60,00	0,24500	9,80	40	80901340
19	28,00	4,50	65	20,00	60,00	0,41400	8,28	20	80901920
19	28,00	4,50	65	20,00	60,00	0,41400	16,56	40	80901940
25	35,00	5,00	250	20,00	60,00	0,50000	20,00	40	80902540